


Item #	(A)	(B)	(C)	(D)	(E)	(F)
	Canopy	Canopy	Fixture	Fixture	Fixture	Cord Length
	Height	Length	Height	Distance	Width	
BLE-C-	1"	24"	11 ½"	24 ½"	8"	Varies
CGGWH2/VAN24						
BLE-C-	1"	24"	11 ½"	24 ½"	8"	Varies
TGGWH2/VAN24						

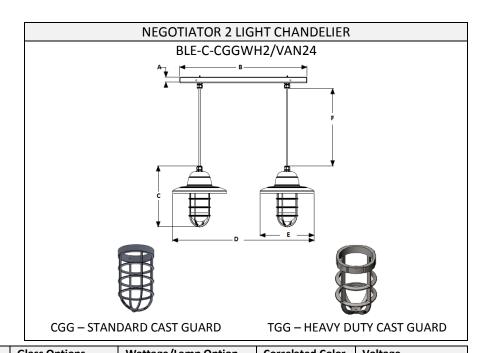

Item #	Standard Finishes	Mounting Option	IS	Canopy Finish	Glass Options	Wattage/Lamp Option	Correlated Color Temperature	Voltage
BLE-C-CGGWH2/VAN24	Powder Coat:	Cord:		Cord:	Vapor Proof	Incandescent (Max 100		
	100 -Black	Standard ¹ :		Canopy color:	Glass³:	watt per socket)		
BLE-C-TGGWH2/VAN24	200- White	SBK	Black	Standard is: Same	CLR- Clear			
	300- Dark Green	SWH	White	as	FST- Frosted	GU-24 Bi-pin(Max 18		Standard 120V
	600 -Bronze	Cotton ² :		fixture (leave code	RIB- Ribbed	watt per socket)		Standard 120V
	605 -Rust	CRZ	Red	blank)				
		Chevron		OR				
	Other:	CGM	Grey	975-Galvanized				
	975-Galvanized	СВК	Black					
		Cotton Twists ² :		Powder Coat:		LED: 16.8 W 1600 Lumen	2700K	
		TBR	Brown	100 -Black				
	For additional colors,	ТВК	Black	200- White			3500K	
	see color chart	TPT	Putty	300 -Dark Green				
		TRD	Red	600 -Bronze			4000K	Standard 120V
		TWH	White	605 -Rust				
		For additional cords, see cord chart		For additional colors, see color chart	For additional glass, see website			
BLE-C-CGGWH2/VAN24	600 SAMPLE ORDER	SBK		600 SAMPLE ORDER	FST	LED SAMPLE ORDER	2700K	
				ORDER SPECIF	ics			

BLE-C Notes:

¹ Suitable for damp locations. Standard length 8ft. Additional lengths available.

² Suitable for dry locations. Standard length 6ft. Additional lengths available.

 $^{^{\}rm 3}$ Clear glass not recommended for LED option.