




Item #	Height (A)	Width (B)	Width (C)
WGG	10 1/4"	4 1/2"	
WGGFS	10 1/4"	4 1/2"	8"
WGGWH	10 1/4"	4 1/2"	10 1/2"
CGG	10 1/4"	4 1/2"	
CGGFS	10 1/4"	4 1/2"	8"
CGGWH	10 1/4"	4 1/2"	10 1/2"
TGG	10 1/4"	4 1/2"	
TGGFS	10 1/4"	4 1/2"	8"
TGGWH	10 1/4"	4 1/2"	10 1/2"

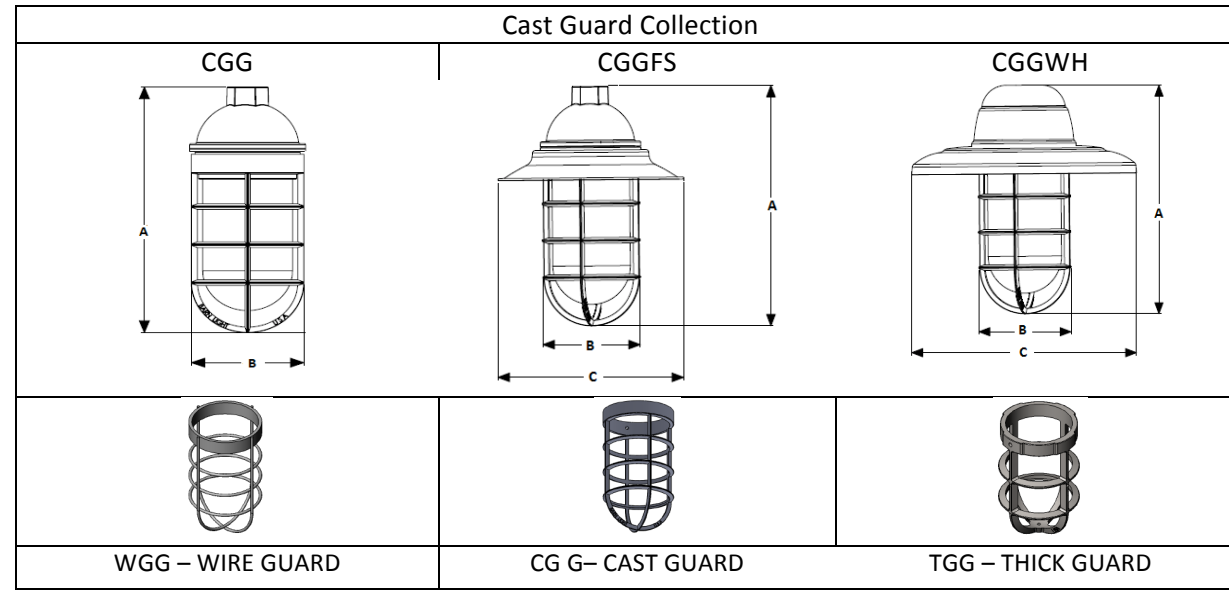

Model #	Item #	Standard Finishes	Mounting Options	Mounting Color	Glass Options	Wattage/Lamp Option
S - Stem Mount	WGG	<i>Other:</i> 975-Galvanized	<i>Cord:</i> Standard ¹ :	<i>Cord:</i> Canopy color: Standard is: Same as fixture (leave code blank)	<i>Vapor Proof Glass</i> CLR- Clear FST- Frosted RIB- Ribbed	Incandescent (Max 100 watt per socket)
C - Cord Hung	CGG	<i>Powder Coat:</i> 100-Black 200- White 300-Dark Green 600-Bronze 605-Rust <i>For additional colors, see color chart</i>	SBK Black SWH White	OR 100-Black 200-White	<i>For additional glass, see website</i>	GU-24 Bi-pin Socket
G-Goose Neck	TGG		Cotton ² : CRZ Red			
F-Flush Mount	WGGFS		Chevron ² : CGM Grey CBK Black			
	CGGFS		Cotton Twists ² : TBR Brown TBK Black TPT Putty TRD Red TWH White			
	TGGFS		Stem: ST _____ ^Specify stem model			
	WGGWH	Gooseneck: G _____ ^Specify gooseneck mode	Stem and Gooseneck: Other: 975-Galvanized 980-Brushed Aluminum			
	CGGWH	Flush Mount: FM	Powder Coat: 100-Black 200-White 300-Dark Green 600-Bronze 605-Rust			
	TGGWH	<i>For additional mounting options and details, see mounting spec sheet</i>				
BLE-C	WGG	100	SBK			

ORDER SPECIFICS

--	--	--	--	--	--	--

Notes:

¹ Suitable for Damp location. Standard length 8 feet. Additional lengths available.

² Suitable for Dry location Only (Not CSA listed). Standard length 6 feet. Additional lengths available.

³ Gooseneck and stems painted to match finish

Suitable for Wet Location (except when cord mounted)