| Item # | Diameter | Height |
|---|---|---|
| DBW08 | 8” | 8 ¼” |
| DBW10 | 10” | 9” |
| DBW12 | 12” | 9 ¾” |
| DBW14 | 14” | 11 ¼” |
| DBW16 | 16” | 12 ¾” |

## PORCELAIN DEEP BOWL SHADE COLLECTION: **Wilcox**

DBW08 DBW10 DBW12 DBW14 DBW16

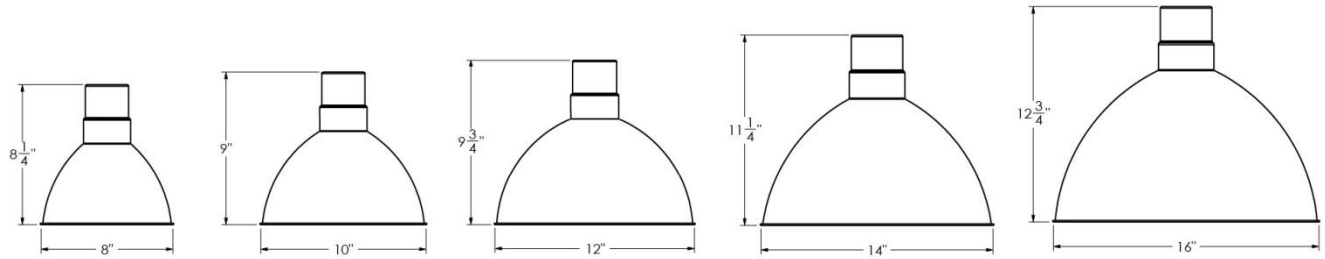


| Model # | Item # | Standard Finishes | Mounting Options | Mounting Color | Optional Accessories | Accessory Colors | Wattage/Lamp Options | Ballast | Voltage |
|---|---|---|---|---|---|---|---|---|---|
| **C**- Cord Hung<br><br>**S**- Stem Mount<br><br>**G**-Goose-Neck<br><br>**F**-Flush Mount | **DBW08**<br>**DBW10**<br>**DBW12**<br>**DBW14**<br>**DBW16** | *Porcelain:*<br>**150**-Black<br>**250**-White<br>**350**-Dark Green<br>**355**-Jadite<br>**650**-Bronze<br><br>*For additional colors, see color chart* | *Cord:*<br>Standard [1]:<br>**SBK** Black<br>**SWH** White<br>Cotton [2]:<br>**CRZ** Red Chevron<br>**CGM** Grey<br>**CBK** Black<br>Cotton Twists [2]:<br>**TBR** Brown<br>**TBK** Black<br>**TPT** Putty<br>**TRD** Red<br>**TWH** White<br><br>*Stem*:<br>**ST** _____<br>^Specify stem model<br>*Gooseneck:*<br>**G** _____<br>^Specify gooseneck mode<br><br>*Flush Mount:*<br>**FM**<br><br>*For additional mounting options and details, see mounting spec sheet* | *Cord:*<br>Canopy color:<br>Standard is: Same as fixture (leave code blank)<br>OR<br>**150**-Black<br>**250**-White<br><br>*Stem and Gooseneck*:<br>Other:<br>**975**-Galvanized<br>**980**-Brushed Aluminum<br><br>Painted to Match [3]:<br>**110**-Black<br>**210**-White<br>**310**-Dark Green<br>**311**-Jadite<br>**610**-Bronze<br><br>*For additional colors, see color chart* | **CGG**-Cast Guard and Glass [4]<br><br>**WGG**-Wire Guard and Glass [4]<br><br>**WC**-Wire Cage<br><br>**HSC**-Hang Straight Canopy<br><br>**HDSM**- Heavy Duty Stem Mount Canopy<br><br>**HDBP**- Heavy Duty Square Backing Plate | *Other:*<br>**975**-Galvanized<br><br>*Painted to Match [5]:*<br>**110**-Black<br>**210**-White<br>**310**-Dark Green<br>**311**-Jadite<br>**610**-Bronze<br><br>*For additional colors, see color chart*<br><br>*Vapor Proof Glass [4]:*<br>**CLR**- Clear<br>**FST**- Frosted | 200 Watt maximum | | |
| *BLE-C* | *DBW10* | *150* | *SBK* | | *WGR* | *110-FST* | | | |

SAMPLE ORDER

**ORDER SPECIFICS**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| BLE- | | | | | | | | | |

Notes:
[1] Suitable for Damp location. Standard length 8 feet. Additional lengths available.
[2] Suitable for Dry location Only (Not CSA listed) Standard length 6 feet. Additional lengths available.
[3] Gooseneck and stems painted to match porcelain finish
[4] Guard/Glass options reduces wattage to 100 W
[5] Accessories painted to match porcelain finish

**Suitable for Wet Location (except when cord mounted)**
**CSA Listed**