




Item #	(A) Canopy Width	(B) Fixture Height	(C) Fixture Width	(D) Fixture Length
BLE-S-SCH10-CH007	4"	17 ¼"	39"	39"
BLE-S-SCH14-CH007	4"	17 ¼"	40 ½"	40 ½"

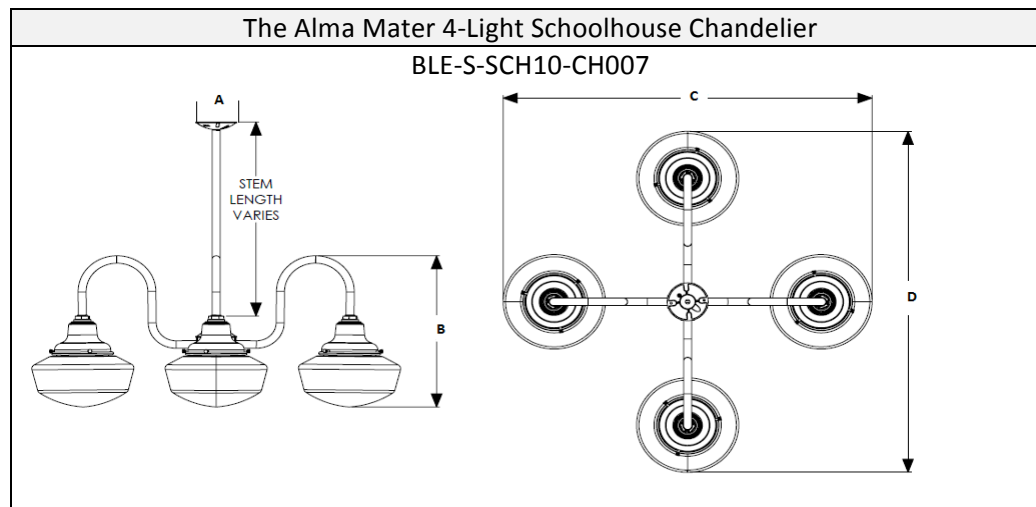

Item #	Standard Finishes	Mounting Options	Mounting Color	Band Quantity	Band Finish	Optional Accessories	Wattage/Lamp Option
BLE-S-SCH10-CH006 BLE-S-SCH14-CH006	<i>Other:</i> 975-Galvanized <i>Powder Coat:</i> 100-Black 200- White 300-Dark Green 600-Bronze 605-Rust <i>For additional colors, see color chart</i>	<i>Stem:</i> ST ^Specify stem model <i>For additional mounting options and details, see mounting spec sheet</i>	<i>Stem</i> <i>Other:</i> 975-Galvanized 980-Brushed Aluminum <i>Powder Coat:</i> 100-Black 200- White 300-Dark Green 600-Bronze 605-Rust <i>For additional colors, see color chart</i>	<i>Leave blank if band is not desired</i> PB1- Single Band PB2- Double Band PB3- Triple Band	<i>Paint:</i> 100-Black 311-Jadite 400-Barn Red 500-Buttery Yellow 600-Bronze 700-Royal Blue	HSC- Hang Straight Canopy HDSM- Heavy Duty Stem Mount Canopy	Incandescent (Max 100 watt per socket) GU-24 Bi-pin Socket
BLE-S-SCH10-CH007	975	ST5012	975	PB1	100		

ORDER SPECIFICS

BLE-S							
-------	--	--	--	--	--	--	--

Suitable for Damp Location