UPLIGHT SHADE COLLECTION: SYDNEY INDUSTRIAL

Item #	Width (A)	Height (B)	Height (C)	Width (D)
ULSI12-PC	4 ¾''	4 ¼"	10 ½''	12''
ULSI14-PC	4 ¾''	4 ¼"	10 ¾''	14''
ULSI16-PC	4 ¾''	5 ½''	11 ¼''	16''
ULSI18-PC	4 ¾''	6 ¼''	12''	18''

ULSI12-PC



ULSI14-PC



ULSI16-PC

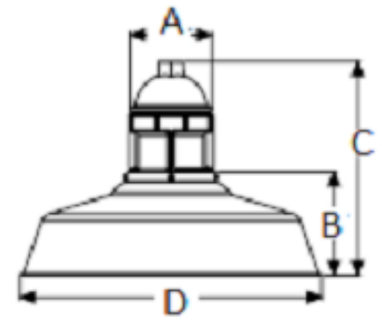

ULSI18-PC

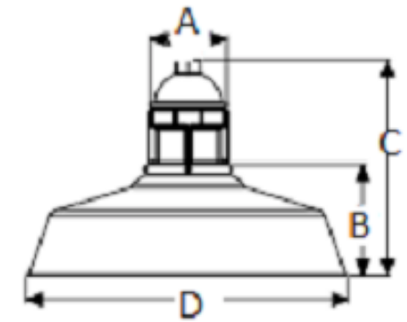

Model #	Item #	Shade Finish	Mounting Options	Mounting Color	Guard Finish	Glass Options	Wattage/Lamp Option
S - Stem Mount **C -** Cord Hung **G**-Gooseneck **F**-Flush Mount	**ULSI12-PC** **ULSI14-PC** **ULSI16-PC** **ULSI18-PC**	*Other:* **975**-Galvanized *Powder Coat:* **100**-Black **200-** White **300**-Dark Green **600**-Bronze **605**-Rust ***For additional colors, see color chart***	*Cord:* Standard [1]: **SBK** Black **SWH** White Cotton [2]: **CRZ** Red Chevron **CGM** Grey **CBK** Black *Stem*: **ST** _____ ^Specify stem model *Gooseneck:* **G** _____ ^Specify gooseneck model *Flush Mount:* **FM** *For additional mounting options and details, see mounting spec sheet*	*Cord:* Canopy color: Standard is: Same as fixture (leave code blank) OR **100**-Black **200**-White *Stem and Gooseneck*: Other: **975**-Galvanized **980**-Brushed Aluminum *Powder Coat:* **100**-Black **200**-White **300**-Dark Green **600**-Bronze **605**-Rust	*Other:* **975**-Galvanized *Powder Coat:* **100**-Black **200-** White **300**-Dark Green **600**-Bronze **605**-Rust ***For additional colors, see color chart***	*Vapor Proof Glass* **CLR-** Clear **FST-** Frosted **RIB-** Ribbed	Incandescent (Max 100 watt per socket) GU-24 Bi-pin Socket
BLE-C	ULSI12	*100*	*SBK*	*100*	*975*	*CLR*	

ORDER SPECIFICS

BLE-	-PC						

[1] Suitable for Damp location. Standard length 8 feet. Additional lengths available.
[2] Suitable for Dry location Only (Not CSA listed). Standard length 6 feet. Additional lengths available.
[3] Gooseneck and stems painted to match finish

Suitable for Wet Location (except when cord mounted)