Item #	Height (A)	Width (B)	Height (C)	Width (D)
BLE-S-WGG-PC	¾''	4 ¼''	10 ¼''	4 ½''
BLE-C-WGG-PC	¾''	5''	10 ¼''	4 ½''

TOPLESS WIRE GUARD PENDANT

BLE-S-WGG-PC

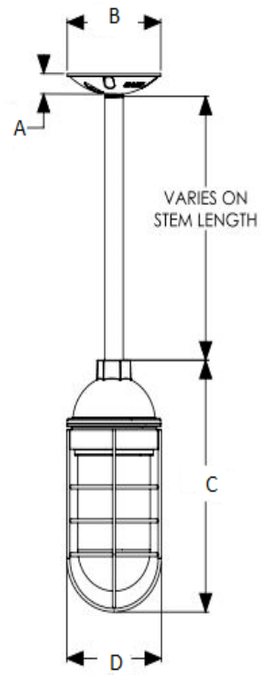

BLE-C-WGG-PC

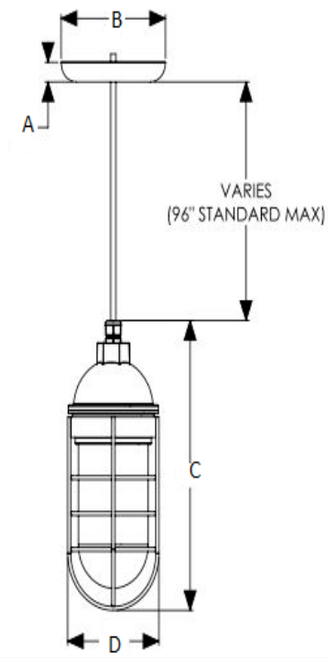

tem #	Shade Finish	Mounting Options	Mounting Color	Guard Finish	Glass Options	Optional Accessories	Accessory Colors	Wattage/Lamp Option
S- Stem C- Cord	*Other:* **975-** Galvanized *Powder Coat:* **100-**Black **200-** White **300**-Dark Green **600-** Bronze **605-**Rust ***For additional colors, see color chart***	*Cord:* Standard [1]: **SBK** Black **SWH** White Cotton [2]: **CRZ** Red Chevron **CGM** Grey **CBK** Black Cotton Twists [2]: **TBR** Brown **TBK** Black **TPT** Putty **TRD** Red **TWH** White *Stem*: **ST** _____ ^Specify stem model	*Powder Coat:* **100**-Black **200-** White **300**-Dark Green **600-** Bronze **605**-Rust ***For additional colors, see color chart***	*Other:* **975-** Galvanized *Powder Coat:* **100**-Black **200-** White **300**-Dark Green **600-** Bronze **605-**Rust ***For additional colors, see color chart***	*Vapor Proof Glass* **CLR-** Clear **FST-** Frosted **RIB-** Ribbed ***For additional colors, see glass options chart***	**HSC**- Hang Straight Canopy **HDC**- Heavy Duty Canopy	*Other:* **975-** Galvanized *Powder Coat:* **100**-Black **200-** White **300**-Dark Green **605**-Rust *For additional colors, see color chart*	Incandescent (Max 100 watt per socket) GU-24 Bi-pin Socket
BLE-S-WGG	*100*	*SBK*	*100*	*975*	*CLR*	*HSC*	*975*	*Incandescent*
BLE-C-WGG	*200*	*TRD*	*200*	*975*	*RIB*			*GU-24 Bi-pin*

Notes:
[1] Suitable for Damp location. Standard length 8 feet. Additional lengths available.
[2] Suitable for Dry location Only (Not CSA listed). Standard length 6 feet. Additional lengths available.

SUITABLE FOR WET LOCATIONS (EXCEPT WHEN CORD HUNG)