




Job Name: _____
 Type: _____
 Quantity: _____

Vapor Jar Collection

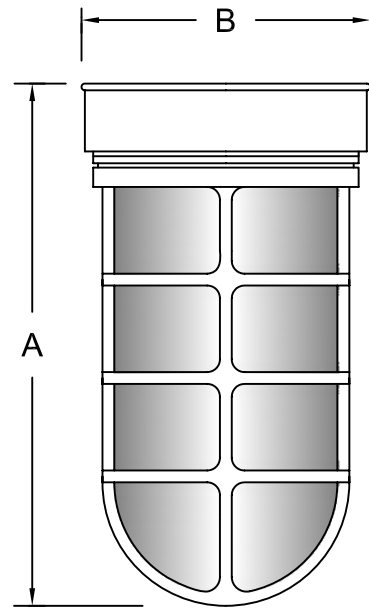

Fixture may be Wall, Flush or Column mounted.

Item Number	Height/Projection (A)	Width (B)
H-MNCGU-FB	9"	4 1/2"
H-CGU-FB	10"	4 1/2"
H-LCGU-FB	11"	6"

Fixture No.	Fixture Color	Glass Color	Guard	Guard Color	Wattage/Lamp options	Ballast	Voltage
H-MNCGU-FB ⁽¹⁾	Standard	CLR (Clear)	GD-1	Standard	Incandescent ⁽¹⁾	Ballast option not available for INC.	(Fixture Is standard 120V. Do not specify.)
H-CGU-FB ⁽¹⁾	91 (Black)	RIB (Clear Ribbed)	GD-2	91 (Black)	(Fixture is standard 100W or 200W. Do not specify.)	RB ⁽³⁾ (Remote)	CFL
H-LCGU-FB ⁽¹⁾	93 (White)	FR (Frost)	GD-3	93 (White)	CFL (Compact Fluorescent)	BCM (Canopy Mount)	M (Multi 120/277V)
	95 (Dk. Grn)	RD (Red)	GD-4	95 (Dk. Grn)	13/CFL	OBB ⁽⁴⁾ (Onboard)	HID
	96 (Galv.)	BL (Blue)	GD-5	96 (Galv.)	18/CFL		RB and BCM
	BR47 (Rust)	GRN (Green)	GD-6	BR47 (Rust)	26/32/42/CFL		M (Multi 120/208/240/277V)
	BK01, GN20.	AM (Amber)	GD-7	For all finishes see pages 344-348.	26/CFL		
	Upgraded Finishes. ⁽²⁾	AMC (Amber Crackle)	GD-8		32/CFL		
	29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.		GD-9		42/CFL		
	For finish specs see pages 344-348.		GD-10		DMB (Dimmable Ballast for CFL. Add to Part No.)		
					HID (High Intensity Discharge)	For specs see pages 341-343.	
					MH (Metal Halide)		
					35/MH		
					50/MH		
					70/MH		
					100/MH		
					150/MH		
					175/MH		
					HPS (High Pressure Sodium)		
					50/HPS		
					70/HPS		
					100/HPS		
					150/HPS		



ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-MNCGU-FB available for 100W Max INC, 26W Max CFL and 100W Max HID.
 H-CGU-FB available for 100W Max INC, 32W Max CFL and 100W Max HID.
 H-LCGU-FB available for 200W Max INC, 42W Max CFL and 175W Max HID.
 - (2) Casting will be painted to match for copper and brass finishes.
 - (3) (RB) Remote ballast not available for Fluorescent Lamping.
 - (4) (OBB) Onboard Ballast will add 2" to the projection.
- Suitable for wet location.**

GD-1 For use with Wall, Flush or Column Mount.	
(No Shield)	
GD-2 For use with Wall, Flush or Column Mount.	
(No Shield)	
GD-3 For use with Wall, Flush or Column Mount.	
(Bottom Quarter Shield)	
GD-4 For use with Wall, Flush or Column Mount.	
(Bottom Quarter Shield)	
GD-5 For use with Wall Mount only.	
(180° Half Shield)	
GD-6 For use with Wall Mount only.	
(180° Half Shield)	
GD-7 For use with Wall, Flush or Column Mount.	
(Top Three Quarter 360° Perforated Shield)	
GD-8 For use with Wall, Flush or Column Mount.	
(Top Three Quarter 360° Perforated Shield)	
GD-9 For use with Wall Mount only.	
(Bottom Quarter and 180° Half Shield)	
GD-10 For use with Wall Mount only.	
(Bottom Quarter and 180° Half Shield)	