




Job Name: _____
 Type: _____
 Quantity: _____

Venus Collection

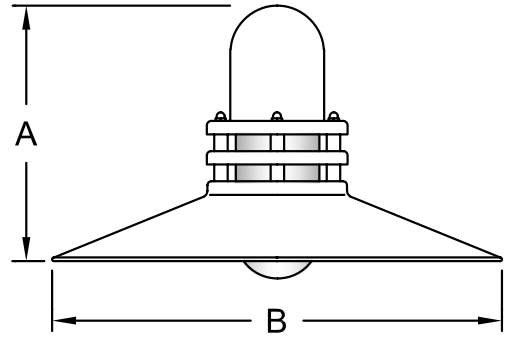

Item Number	Height (A)	Width (B)
H-1408	7"	8"
H-1410	7 1/4"	10"
H-1412	8 1/2"	12"
H-1414	9"	14"
H-1416	9 1/2"	16"
H-1418	12"	18"
H-1420	12 1/2"	20"
H-1422	13 1/2"	22"
H-1424	14 1/2"	24"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-1408 ⁽¹⁾	Standard ⁽²⁾	CLR (Clear)	Mounting Options 1/2" 3/4"	Standard 91 (Black) 93 (White)	SK (Swivel knuckle)	Standard 91 (Black) 93 (White)	Incandescent (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-1410 ⁽¹⁾	91 (Black) 93 (White)	RIB (Clear Ribbed)	Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	FX (Flexible tubing for cord mounted fixture only)	95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	CFL (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	RB ⁽⁴⁾ (Remote)	CFL M (Multi 120/277V)
H-1412 ⁽¹⁾	95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	FR (Frost)	Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length.	For all finishes see pages 344-348.	CAL (Clear Acrylic Layer)	For all finishes see pages 344-348.	13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	BCM (Canopy Mount)	HID RB and BCM M (Multi 120/208/240/277V)
H-1414 ⁽¹⁾	96 (Galv.) BR47 (Rust)	RD (Red)	Stem Options (Stem 1/2") ST Specify length and canopy.		BAL (Blue Acrylic Layer)		26/CFL 32/CFL 42/CFL 57/CFL	PLB ⁽⁵⁾ (Postline ballast)	
H-1416 ⁽¹⁾	BR47 (Rust)	BL (Blue)	Flush Mount Options FHSC FSMC		RAL (Red Acrylic Layer)		DMB (Dimmable Ballast for CFL. Add to Part No.)	For specs see pages 341-343.	PLB 1 (120V) 2 (277V)
H-1418 ⁽¹⁾	BK01, GN20.	GRN (Green)	Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D		GNAL (Green Acrylic Layer)		HID (High Intensity Discharge)		
H-1420 ⁽¹⁾	Upgraded Finishes. 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.	AM (Amber)	For all arms and specs see pages 321-344.		For specs see pages 321-344.		MH (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
H-1422 ⁽¹⁾	For finish specs see pages 344-348.	AMC (Amber Crackle)					HPS (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
H-1424 ⁽¹⁾									

H-1408 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-1408, H-1410, H-1412, H-1414 and H-1416 available for 100W Max INC, 32W Max CFL and 100W Max HID.
 H-1418, H-1420, H-1422 and H-1424 available for 200W Max INC, 57W Max CFL and 175W Max HID
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Cord Mounting wattage not to exceed 100 for HID.
 Gray Mesh Cord not available for HID.
- (4) (RB) Remote Ballast is not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V.
 (PLB) 50W MH requires a 3" dia. pole.
 (PLB) 70W and 100W MH require a 4" dia. pole.
 (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

Suitable for wet location.
 (Except when cord mounted)