




Job Name: _____
 Type: _____
 Quantity: _____


Venus Collection

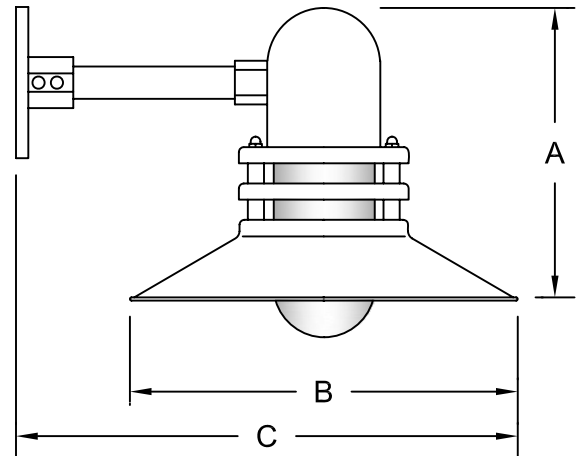

Item Number	Height (A)	Width (B)	Projection (C)
H-1508-B	7"	8"	11"
H-1510-B	7 1/4"	10"	14"
H-1512-B	8 1/2"	12"	15"
H-1514-B	9"	14"	20"
H-1516-B	9 1/2"	16"	22"
H-1518-B	12"	18"	24"
H-1520-B	12 1/2"	20"	26"
H-1522-B	13 1/2"	22"	28"
H-1524-B	14 1/2"	24"	30"

For Wall Mount Only

Fixture No.	Fixture Color	Glass Color	Optional Accessories	Wattage/Lamp options	Ballast	Voltage
H-1508-B ⁽¹⁾	Standard ⁽²⁾	CLR (Clear)	CAL (Clear Acrylic Layer)	Incandescent ⁽¹⁾ (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-1510-B ⁽¹⁾	91 (Black)	RIB (Clear Ribbed)	BAL (Blue Acrylic Layer)	CFL ⁽¹⁾ (Compact Fluorescent)	RB ⁽³⁾ (Remote)	CFL M (Multi 120/277V)
H-1512-B ⁽¹⁾	95 (Dk. Grn)	FR (Frost)	RAL (Red Acrylic Layer)	13/CFL	BCM (Canopy Mount)	HID
H-1514-B ⁽¹⁾	96 (Galv.)	RD (Red)	GNAL (Green Acrylic Layer)	18/CFL	For specs see pages 341-343.	RB and BCM
H-1516-B ⁽¹⁾	BR47 (Rust)	BL (Blue)	For specs see pages 321-344.	26/32/42/CFL		M (Multi 120/208/240/277V)
H-1518-B ⁽¹⁾	BK01, GN20.	GRN (Green)		26/CFL		
H-1520-B ⁽¹⁾	Upgraded Finishes	AM (Amber)		32/CFL		
H-1522-B ⁽¹⁾	29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 24, 44, 48, 49.	AMC (Amber Crackle)		42/CFL		
H-1524-B ⁽¹⁾	For finish specs see pages 344-348.			57/CFL		
				DMB (Dimmable Ballast for CFL. Add to Part No.)		
				HID ⁽¹⁾ (High Intensity Discharge)		
				MH ⁽¹⁾ (Metal Halide)		
				35/MH		
				50/MH		
				70/MH		
				100/MH		
				150/MH		
				175/MH		
				HPS ⁽¹⁾ (High Pressure Sodium)		
				50/HPS		
				70/HPS		
				100/HPS		
				150/HPS		

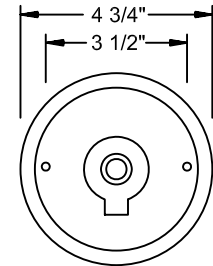

Mounting Detail

H-1508-B	91	CLR	CAL	13/CFL	-	1
----------	----	-----	-----	--------	---	---

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

(1) H-1508-B, H-1510-B, H-1512-B, H-1514-B and H-1516-B available for 100W Max INC, 32W Max CFL and 100W Max HID.
 H-1518-B, H-1520-B, H-1522-B and H-1524-B available for 200W Max INC, 57W Max CFL and 175W Max HID.

(3) (RB) Remote ballast not available for Fluorescent Lamping.

(2) For interior finish of fixture refer to color chart on pages 344-348.

Suitable for wet location.