




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

### Oberon Collection

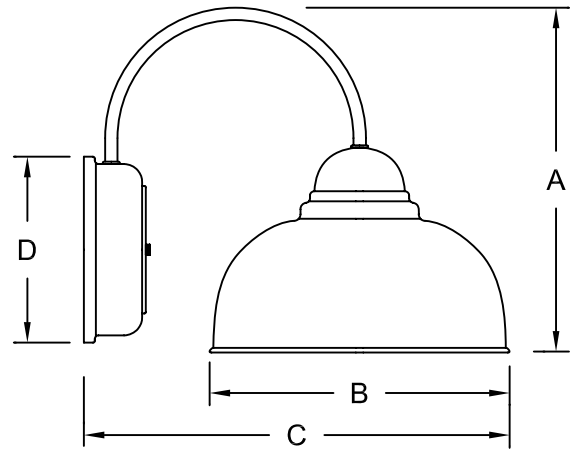

For Wall  
Mount Only

Item Number	Height (A)	Width (B)	Projection (C)	Diameter of Canopy (D)
H-24108-B	10"	8 1/2"	10 1/2"	5 1/2"
H-24110-B	11"	10"	14"	6 1/4"
H-24112-B	12"	12"	15"	6 1/4"

Fixture No.	Fixture Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	Ballast	Voltage
H-24108-B <sup>(1)</sup>	Standard <sup>(2)</sup>	<b>CGU</b> (Cast guard & glass)	Standard	Incandescent (Fixture is standard 100W. Do not specify)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-24110-B	<b>91</b> (Black)	<b>WGU</b> (Wire guard & glass)	<b>91</b> (Black)	CFL <sup>(3)</sup> (Compact Fluorescent)	<b>RB</b> <sup>(4)</sup> (Remote)	CFL <b>M</b> (Multi 120/277V)
H-24112-B	<b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20.</b>	<b>6OP</b> (6" Opal ball)	<b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)	<b>13/CFL</b> <b>18/CFL</b> <b>26/32/CFL</b> <b>26/CFL</b> <b>32/CFL</b>	<b>BCM</b> (Canopy Mount)	HID RB and BCM <b>M</b> (Multi 120/208/240/277V)
	Upgraded Finishes <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 11, 121, 122, 123, 124, 125, 126, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>	<b>WGR</b> (Wire guard)	For all finishes see pages 344-348.	<b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	For specs see pages 341-343.	
	For finish specs see pages 344-348.	<b>DWG-1</b> (H-24108-B) <b>DWG-2</b> (H-24110-B) <b>DWG-3</b> (H-24112-B) (Drop wire guard)		HID <sup>(3)</sup> (High Intensity Discharge)		
		For specs and glass color see pages 321-344.		MH <sup>(3)</sup> (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b>		
				HPS <sup>(3)</sup> (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b>		

**ORDER EXAMPLE**  
(USE THIS FORMAT TO PLACE ORDER)

**Notes:**

- (1) H-24108-B not available with glass enclosures.
- (2) For interior finish of fixture refer to color chart on pages 344-348. H-24110-B and H-24112-B not available in copper finish.
- (3) Requires Globe Option. (See pages 339-341 for Globe Options) Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID.
- (4) (RB) Remote ballast not available for Fluorescent Lamping.

Suitable for wet location.