




Job Name: _____
 Type: _____
 Quantity: _____

Item Number	Height (A)	Width (B)
H-30109	5 1/2"	9"
H-30114	12"	14"
H-30116	12"	16"
H-30118	13"	18"

Item Number	Height (A)	Width (B)
H-30120	16 1/2"	20"
H-30122	17 1/2"	22"
H-30124	18 1/2"	24"
H-30125	19 1/2"	25"

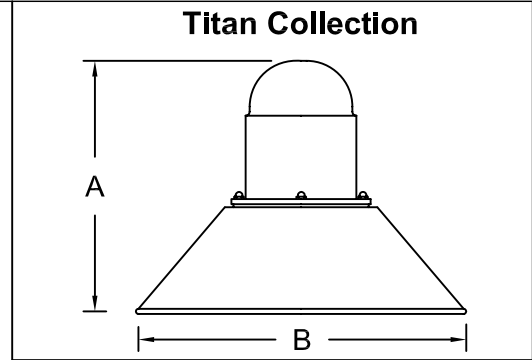

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-30109 ⁽¹⁾	Standard ⁽²⁾	Mounting Options	Standard	CGU (Cast guard and glass)	Standard	Incandescent (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-30114	91 (Black)	1/2"	91 (Black)	LCGU (Large cast guard and glass)	91 (Black)	CFL (5) (Compact Fluorescent)	RB (6) (Remote)	CFL M (Multi 120/277V)
H-30116	93 (White)	3/4"	93 (White)	WGU (Wire guard and glass)	93 (White)	13/CFL	BCM (Canopy Mount)	HID RB and BCM
H-30118	95 (Dk. Grn)	For H-16007 and H-16008 only	95 (Dk. Grn)	LWGU (Large wire guard and glass)	95 (Dk. Grn)	18/CFL	PLB (7) (Postline)	M (Multi 120/208/240/277V)
H-30120	96 (Galv.)	CB7 (7" Blk Cord)	96 (Galv.)	ARN (Acorn globe)	96 (Galv.)	26/CFL	OB (Onboard)	PLB 1 (120V) 2 (277V)
H-30122	BR47 (Rust)	CW7 (7" Wht Cord)	BR47 (Rust)	LARN (Large acorn globe)	BR47 (Rust)	32/CFL	OB (8) (Fluorescent Options 13W-57W)	
H-30124	BK01, GN20.	CG7 (7" Grey Mesh Cord)	For all finishes see pages 344-348.	WGR (Wire guard)	For all finishes see pages 344-348.	42/CFL	OB (8) (HID Options 35W-175W)	
H-30125	Upgraded Finishes. 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.	Cord Options ⁽³⁾ CB8 (8" Blk Cord) CW8 (8" Wht Cord) CG8 (8" Gray Mesh Cord)		SK (Swivel Knuckle)		57/CFL	For specs see pages 341-343.	
	For finish specs see pages 344-348.	Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length.		BGPC (Conical) BGPD (Domed) (Bottom Glass Panel)		DMB (Dimmable Ballast for CFL. Add to Part No.)		
		Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy)		For H-30120 - H-30125 only. OPGL (Opal Globe)		HID (5) (High Intensity Discharge)		
		Flush Mount Options FHSC FSMC		CLGL (Clear Globe)		MH (5) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
		Post top Options ⁽⁴⁾ 3PTLCGU		For H-30116 and H-30122 only. CLLS (Conical lens) SFL (Smooth Flat Lens)		HPS ⁽⁵⁾ (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
		Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D		For H-30125 only. DPL (Drop Lens)				
		For all arms and specs see pages 321-344.		For specs and glass color see pages 321-344.				

H-30114	-	91	/	1/2"	-	91	/	CGU-CLR	-	91	/	13/CFL	-	BCM	-	M
---------	---	----	---	------	---	----	---	---------	---	----	---	--------	---	-----	---	---

ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-30109 available for 100W Max INC and not available with glass enclosures.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (4) (3PTLCGU) For 3" Post Top with LCGU, specify Glass Color CLR, FR, RIB, RD, BL, GRN, AM or AMC. 3PTLCGU available for H-30120, H-30122, H-30124 and H-30125.
- (5) Requires Globe Option (See pages 339-341 for Globe Options) CGU and WGU Max. Wattage 100W INC, 100W HID and 32W CFL. LWGU, LCGU, ARN and LARN Max Wattage 200W INC, 175W HID and 57W CFL.
- (6) (RB) Remote Ballast not available for Fluorescent Lamping.
- (7) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (8) H-30109 not available with onboard ballast. H-30114, H-30116 and H-30118 available with 100W Max HID and 57W Max CFL onboard ballast. H-30122, H-30124 and H-30125 available with 175W Max HID and 57W Max CFL onboard ballast.

Suitable for wet location.
 (Except when cord mounted)