


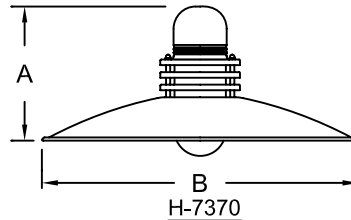





Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Pendant Collection



Item Number	Height (A)	Width (B)
H-506	12"	13"
H-1344	13"	10"
H-1320	11"	16"
H-7370	9"	18"
H-7375	10"	9"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
<b>H-506</b> (1) <b>H-1344</b> (1) <b>H-1320</b> (1) <b>H-7370</b> (1) <b>H-7375</b> (1)	Standard (2) <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20</b> .  Upgraded Finishes. <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.</b>  For finish specs see pages 344-348.	<b>CLR</b> (Clear)  <b>RIB</b> (Clear Ribbed)  <b>FR</b> (Frost)  <b>RD</b> (Red)  <b>BL</b> (Blue)  <b>GRN</b> (Green)  <b>AM</b> (Amber)  <b>AMC</b> (Amber Crackle)	Mounting Options <b>1/2"</b> <b>3/4"</b>  Cord Options(3) <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options (3) <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.  Stem Options (Stem 1/2") <b>ST</b> Specify length and canopy <b>HSC</b> (Canopy) <b>SMC</b> (Canopy)  Flush Mount Options <b>FHSC</b> <b>FSMC</b>  Arm Options <b>B-1 HL-K</b> <b>HL-A HL-U</b> <b>HL-H P-1</b> <b>HL-C P-3</b> <b>HL-D</b>  For all arms and specs see pages 319-342,	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 343-346.	<b>SK</b> (Swivel knuckle)  <b>FX</b> (Flexible tubing for cord mounted fixture only)  For H-1320 and H-7370 only <b>CAL</b> (Clear Acrylic Layer)  <b>BAL</b> (Blue Acrylic Layer)  <b>RAL</b> (Red Acrylic Layer)  <b>GNAL</b> (Green Acrylic Layer)  For specs see pages 334-342.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 343-346.	Incandescent (1) (Fixture is standard 100W or 200W. Do not specify)  CFL (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)  HID (High Intensity Discharge)  MH (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>  HPS (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>	Ballast option not available for INC.  <b>RB</b> (4) (Remote)  <b>BCM</b> (Canopy Mount)  <b>PLB</b> (5) (Postline ballast)  For specs see pages 340-341.	Incandescent <b>1</b> (120V)  CFL <b>M</b> (Multi 120/277V)  HID <b>RB</b> and <b>BCM</b> <b>M</b> (Multi 120/208/240/277V)  PLB <b>1</b> (120V) <b>2</b> (277V)

↓
↓
↓
↓
↓
↓
↓
↓
↓
↓

**H-506** - **91** - **CLR** / **1/2"** - **91** / **SK** - **91** / **13/CFL** - **BCM** - **M**

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

- Notes:**
- (1) H-7370 and H-7375 available for 100W Max INC, 32W Max CFL and 100W Max HID. H-506, H-1344 and H-1320 available for 200W Max INC, 57W Max CFL and 175W Max HID
  - (2) For interior finish of fixture refer to color chart on pages 343-346.
  - (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
  - (4) (RB) Remote Ballast not available for Fluorescent Lamping.
  - (5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

Suitable for wet location.  
 (Except when cord mounted)