




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

Item Number	Height (A)	Width (B)
H-54016	7 1/2"	16"
H-54024	11"	24"
H-54216	10"	16"
H-54224	13"	24"

## Umbrella Collection

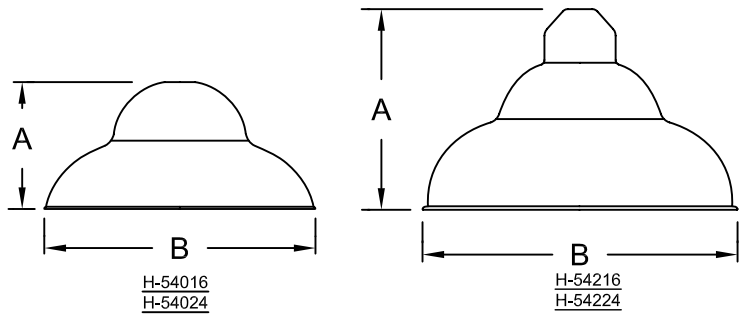

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	Ballast	Voltage
<b>H-54016</b> <b>H-54024</b> <b>H-54216</b> <b>H-54224</b>	Standard (1) <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20</b> .  Upgraded Finishes. <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>  For finish specs see pages 344-348.	Mounting Options <b>1/2"</b> <b>3/4"</b>  Cord Options <sup>(2)</sup> <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options <sup>(2)</sup> <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.  Stem Options (Stem 1/2") <b>ST</b> Specify length and canopy. <b>HSC</b> (Canopy) <b>SMC</b> (Canopy)  Flush Mount Options <b>FHSC</b> <b>FSMC</b>  Post Top Options <sup>(2)</sup> <b>3PTLCGU</b>  Arm Options <b>B-1 HL-K</b> <b>HL-A HL-U</b> <b>HL-H P-1</b> <b>HL-C P-3</b> <b>HL-D</b>  For all arms and specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	<b>CGU</b> (Cast guard & glass)  <b>LCGU</b> (Large cast guard & glass)  <b>WGU</b> (Wire guard & glass)  <b>LWGU</b> (Large wire guard & glass)  <b>ARN</b> (Acorn globe)  <b>LARN</b> (Large acorn globe)  <b>WGR</b> (Wire guard)  <b>SK</b> (Swivel knuckle)  <b>FX</b> (Flexible tubing for cord mounted fixture only)  For specs and glass color see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	Incandescent (Fixture is standard 200W. Do not specify.)  CFL <sup>(4)</sup> (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>32/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)  HID <sup>(4)</sup> (High Intensity Discharge)  MH <sup>(4)</sup> (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>  HPS <sup>(4)</sup> (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>	Ballast option not available for INC.  <b>RB</b> <sup>(5)</sup> (Remote)  <b>BCM</b> (Canopy Mount)  <b>PLB</b> <sup>(6)</sup> (Postline)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)  PLB <b>1</b> (120V) <b>2</b> (277V)

H-54016 - 91 / 1/2" - 91 / CGU-CLR - 91 / 13/CFL - BCM - M

ORDER EXAMPLE  
 (USE THIS FORMAT TO PLACE ORDER)

### Notes:

- For interior finish of fixture refer to color chart on pages 344-348. H-54024 and H-54224 not available in copper or brass finish.
- Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (3PTLCGU) For 3" Post Top with LCGU, specify Glass Color CLR, FR, RIB, RD, BL, GRN, AM or AMC. See page 340 for details.
- Requires Globe Option. (See pages 339-341 for Globe Options)  
 Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID.  
 Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL and 175W HID.
- (RB) Remote Ballast not available for Fluorescent Lamping.
- (PLB) Post Line Ballast must specify 120V or 277V.  
 (PLB) 50W MH requires a 3" dia. pole.  
 (PLB) 70W and 100W MH require a 4" dia. pole.  
 (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

Suitable for wet location.  
 (Except when cord mounted)