




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

Item Number	Height (A)	Width (B)	Projection (C)	Diameter of Canopy (D)
H-7131-B	11"	10"	11"	5 1/2"
H-7161-B	10"	8"	9"	5 1/2"
H-7412-B	12"	12"	13 1/2"	6 1/4"
H-7414-B	13"	14"	15 1/2"	6 1/4"
H-7416-B	14"	16"	17 1/2"	6 1/4"

For Wall Mount Only

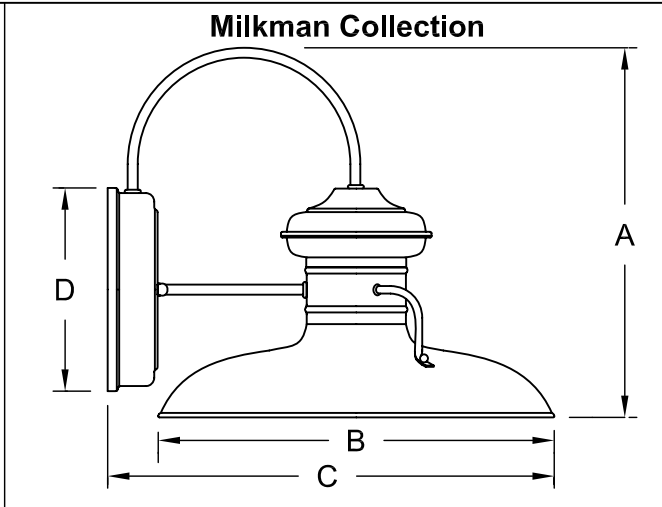

Fixture No.	Fixture Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	Ballast	Voltage
<b>H-7131-B</b> (1)	Standard (2)	<b>CGU</b> (Cast guard & glass)	Standard	Incandescent (1) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
<b>H-7161-B</b> (1)	<b>91</b> (Black)		<b>91</b> (Black)			
<b>H-7412-B</b> (1)	<b>93</b> (White)		<b>93</b> (White)			
<b>H-7414-B</b> (1)	<b>95</b> (Dk. Grn)	<b>LCGU</b> (Large cast guard & glass)	<b>95</b> (Dk. Grn)		<b>RB</b> (4) (Remote)	CFL <b>M</b> (Multi 120/277V)
<b>H-7416-B</b> (1)	<b>96</b> (Galv.)		<b>96</b> (Galv.)			
	<b>BR47</b> (Rust)		<b>BR47</b> (Rust)		<b>BCM</b> (Canopy mount)	HID RB and BCM <b>M</b> (Multi 120/208/240/277V)
	<b>BK01, GN20.</b>				For specs see pages 341-343.	
	Upgraded Finishes <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 11, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>	<b>WGU</b> (Wire guard & glass)	For all finishes see pages 344-348.	CFL(3) (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>		
	For finish specs see pages 344-348.	<b>LWGU</b> (Large wire guard & glass)		<b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)		
		<b>ARN</b> (Acorn globe)		HID (3) (High Intensity Discharge)		
		<b>WGR</b> (Wire guard)		MH (3) (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>		
		For specs and glass color see pages 321-344.		HPS (3) (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>		

H-7412-B - 91 / CGU - 91 / 13/CFL - BCM - M

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-7131-B and H-7161-B available for 100W Max INC and not available with glass enclosures. H-7412-B available for 100W Max INC, 32W Max CFL and 100W Max HID. H-7414-B and H-7416-B available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) For interior finish of fixture refer to color chart on pages 344-348. H-7414-B and H-7416-B not available in copper finish.
- (3) Requires Globe Option (See pages 339-341 for Globe Options). CGU, WGU and ARN Max. Wattage 100W INC, 100W HID and 32W CFL.
- (4) (RB) Remote Ballast not available for Fluorescent Lamping.

Suitable for wet location.