




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

### Mars Collection

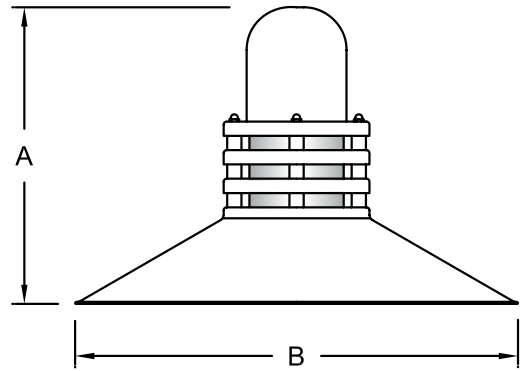

Fixture No.	Height (A)	Width (B)
H-91408	7 1/2"	8"
H-91410	7 3/4"	10"
H-91412	9"	12"
H-91414	9 1/2"	14"
H-91416	10"	16"
H-91418	12 1/2"	18"
H-91420	13"	20"
H-91422	14"	22"
H-91424	15"	24"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
<b>H-91408</b> (1)	Standard (2)	<b>CLR</b> (Clear)	Mounting Options <b>1/2"</b> <b>3/4"</b>	Standard <b>91</b> (Black) <b>93</b> (White)	<b>SK</b> (Swivel knuckle)	Standard <b>91</b> (Black) <b>93</b> (White)	Incandescent (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
<b>H-91410</b> (1)	<b>91</b> (Black)	<b>RIB</b> (Clear Ribbed)	Cord Options(3) <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)	<b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)	<b>FX</b> (Flexible tubing for cord mounted fixture only)	<b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)	CFL (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>	<b>RB</b> (4) (Remote)	CFL <b>M</b> (Multi 120/277V)
<b>H-91412</b> (1)	<b>95</b> (Dk. Grn)	<b>FR</b> (Frost)	Custom Cord Options (3) <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.	For all finishes see pages 344-348.	<b>CAL</b> (Clear Acrylic Layer)	For all finishes see pages 344-348.	<b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	<b>BCM</b> (Canopy Mount)	HID RB and BCM <b>M</b> (Multi 120/208/240/277V)
<b>H-91414</b> (1)	<b>96</b> (Galv.)	<b>BL</b> (Blue)	Stem Options (Stem 1/2") <b>ST</b> Specify length and canopy.		<b>BAL</b> (Blue Acrylic Layer)		HID (High Intensity Discharge)	<b>PLB</b> (5) (Postline)	PLB <b>1</b> (120V) <b>2</b> (277V)
<b>H-91416</b> (1)	<b>BR47</b> (Rust)	<b>GRN</b> (Green)	Flush Mount Options <b>FHSC</b> <b>FSMC</b>		<b>RAL</b> (Red Acrylic Layer)		MH (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>		
<b>H-91418</b> (1)	<b>BK01, GN20.</b>	<b>AM</b> (Amber)	Arm Options <b>B-1</b> <b>HL-K</b> <b>HL-A</b> <b>HL-U</b> <b>HL-H</b> <b>P-1</b> <b>HL-C</b> <b>P-3</b> <b>HL-D</b>		<b>GNAL</b> (Green Acrylic Layer)		HPS (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>		
<b>H-91420</b> (1)	Upgraded Finishes. <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.</b>	<b>AMC</b> (Amber Crackle)	For all arms and specs see pages 321-344.		For specs see pages 321-344.				
<b>H-91422</b> (1)									
<b>H-91424</b> (1)									
	For finish specs see pages 344-348.								

H-91408 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

**Notes:**

- (1) H-91408, H-91410, H-91412, H-91414 and H-91416 available for 100W Max INC, 32W Max CFL and 100W Max HID. H-91418, H-91420, H-91422 and H-91424 available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

- (4) (RB) Remote Ballast not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

**Suitable for wet location.**  
 (Except when cord mounted)