

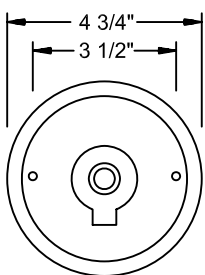


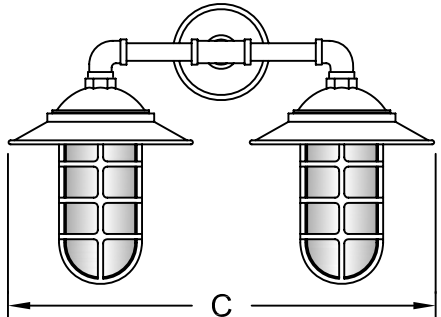

Job Name: _____
 Type: _____
 Quantity: _____

Angle Vapor Jar Collection

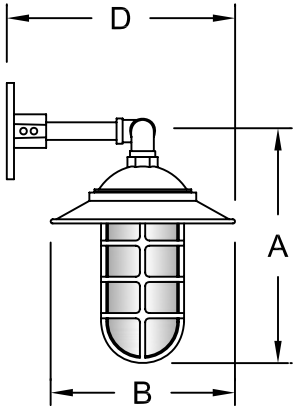

Mounting Detail

For Wall Mount Only

Item Number	Height (A)	Width (B)	Length (C)	Projection (D)
H-CGU-SS-8-2B	10"	8"	20"	10"
H-LCGU-SS-10-2B	13"	10"	22 1/2"	12"
H-LCGU-SS-12-2B	13"	12"	30"	15"

Fixture No.	Fixture Color	Glass Color	Wattage/Lamp options	Ballast	Voltage
H-CGU-SS-8-2B ⁽¹⁾	Standard	CLR	Incandescent	Ballast option	Incandescent
H-LCGU-SS-10-2B ⁽¹⁾	91 (Black)	(Clear)	(Fixture is standard 2-100W or 2-200W. Do not specify.)	not available for INC	(Fixture is standard 120V. Do not specify.)
H-LCGU-SS-12-2B ⁽¹⁾	93 (White)	RIB		For CFL only	
	95 (Dk. Grn)	(Clear Ribbed)		BCM ⁽³⁾	
	96 (Galv.)			(Canopy Mount)	CFL
	BR47 (Rust)	FR	CFL	For HID only	M
	BK01, GN20.	(Frost)	(Compact Fluorescent)	RB ⁽³⁾	(Multi 120/277V)
	Upgraded Finishes ⁽²⁾	RD	2-13/CFL	(Remote)	HID
	29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	BL	2-18/CFL	For specs see pages 341-343.	M
	For finish specs see pages 344-348.	(Blue)	2-26/CFL		(Multi 120/208/240/277V)
		GRN	2-32/CFL		
		(Green)	2-42/CFL		
		AM	2-57/CFL		
		(Amber)	DMB		
		AMC	(Dimmable Ballast for CFL. Add to Part No.)		
		(Amber Crackle)	HID		
			(High Intensity Discharge)		
			MH		
			(Metal Halide)		
			2-35/MH		
			2-50/MH		
			2-70/MH		
			2-100/MH		
			2-150/MH		
			2-175/MH		
			HPS		
			(High Pressure Sodium)		
			2-50/HPS		
			2-70/HPS		
			2-100/HPS		
			2-150/HPS		

H-CGU-SS-8-2B - 91 - CLR / 2-13/CFL - BCM - M

ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-CGU-SS-8-2B available for 2-100W Max INC, 2-32W Max CFL and 2-100W Max HID.
 H-LCGU-SS-10-2B and H-LCGU-SS-12-2B available for 2-200W Max INC, 2-57W Max CFL and 2-175W Max HID.
 Above fixtures available with WGU wireguard.
- (2) Casting will be painted to match copper and brass finishes.
- (3) (RB) Remote Ballast not available for Fluorescent Lamping.
 (BCM) Ballast Canopy Mount not available for HID Lamping.

Suitable for wet location.