




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

### Saucer Vapor Jar Collection

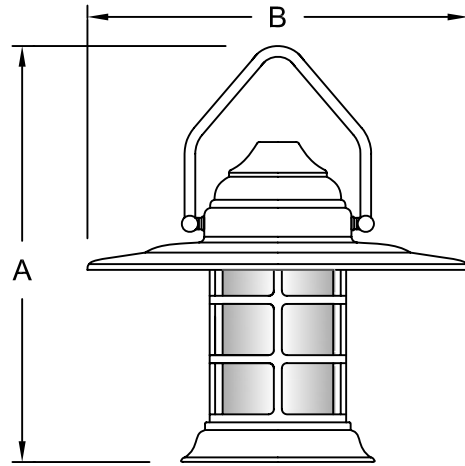

Item Number	Height (A)	Width (B)
H-MNCGU-10-RG-1-A	12"	10"
H-CGU-10-RG-1-A	13"	10"
H-LCGU-14-RG-1-A	16"	13"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Wattage/Lamp options	Ballast	Voltage
<b>H-MNCGU-10-RG-1-A</b> <sup>(1)</sup>	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20.</b>  Upgraded Finishes.(2) <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89.</b>  For finish specs see pages 344-348.	<b>CLR</b> (Clear)  <b>RIB</b> (Clear Ribbed)  <b>FR</b> (Frost)  <b>RD</b> (Red)  <b>BL</b> (Blue)  <b>GRN</b> (Green)  <b>AM</b> (Amber)  <b>AMC</b> (Amber Crackle)	Cord Options (3) <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options (3) <b>CB</b> ___ (Black) <b>CW</b> ___ (White) <b>CG</b> ___ (Gray Mesh) Specify length.  For all arms and specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	Incandescent (Fixture is standard 100W or 200W. Do not specify.)  CFL (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)  HID (High Intensity Discharge)  MH (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>  HPS (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>	Ballast option not available for INC.  <b>RB</b> <sup>(4)</sup> (Remote)  <b>BCM</b> (Canopy Mount)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)
<b>H-CGU-10-RG-1-A</b> <sup>(1)</sup>							
<b>H-LCGU-14-RG-1-A</b> <sup>(1)</sup>							

↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓

H-MNCGU-10-RG-1-A - 
 91 - 
 CLR / 
 1/2" - 
 91 / 
 35/MH - 
 RB / 
 M

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

**Notes:**

(1) H-MNCGU-10-RG-1-A and H-CGU-10-RG-1-A available for 100W Max INC, 32W Max CFL and 100W Max HID. H-LCGU-14-RG-1-A available for 200W Max INC, 57W Max CFL and 175W Max HID. Above fixtures available with WGU wireguard.

(2) Casting will be painted to match for brass finish.

(3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

(4) (RB) Remote Ballast not available for Fluorescent Lamping.

**Suitable for wet location.**  
 (Except when cord mounted)