




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

# Pendant Collection

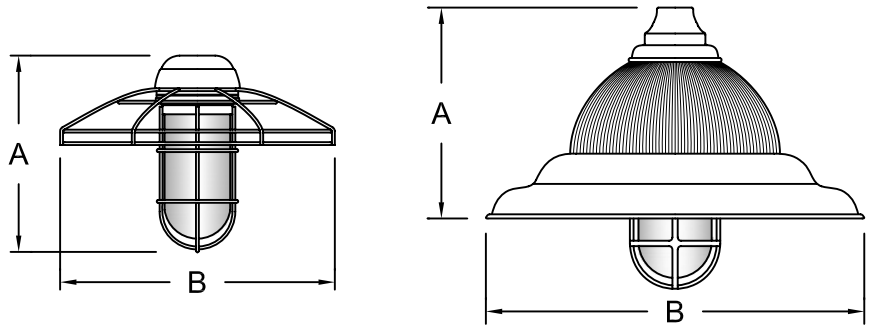

H-WGUGR-8, H-WGUGR-10  
 H-WGUGR-12, H-WGUGR-14  
 H-WGUGR-16, H-WGUGR-17  
 H-WGUGR-18

H-403/CGU

Item Number	Height (A)	Width (B)
H-WGUGR-8	10"	8"
H-WGUGR-10	10"	10"
H-WGUGR-12	10"	12"
H-WGUGR-14	10"	14"
H-WGUGR-16	10"	16"
H-WGUGR-17	10"	17"
H-WGUGR-18	10"	18"
H-403/CGU	11"	15"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
<b>H-WGUGR-8</b> <b>H-WGUGR-10</b> <b>H-WGUGR-12</b> <b>H-WGUGR-14</b> <b>H-WGUGR-16</b> <b>H-WGUGR-17</b> <b>H-WGUGR-18</b> <b>H-403/CGU</b>	Standard (1) 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20.  Upgraded Finishes. 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.  For finish specs see pages 344-348.	<b>CLR</b> (Clear)  <b>RIB</b> (Clear Ribbed)  <b>FR</b> (Frost)  <b>RD</b> (Red)  <b>BL</b> (Blue)  <b>GRN</b> (Green)  <b>AM</b> (Amber)  <b>AMC</b> (Amber Crackle)	Mounting Options <b>1/2"</b> <b>3/4"</b>  Cord Options(2) <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options (2) <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.  Stem Options (Stem 1/2") <b>ST</b> Specify length and canopy. <b>HSC</b> (Canopy) <b>SMC</b> (Canopy)  Flush Mount Options <b>FHSC</b> <b>FSMC</b>  Arm Options <b>B-1 HL-K</b> <b>HL-A HL-J</b> <b>HL-H P-1</b> <b>HL-C P-3</b> <b>HL-D</b>  For all arms and specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	<b>SK</b> (Swivel knuckle)  <b>FX</b> (Flexible tubing for cord mounted fixture only)  For specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	Incandescent (Fixture is standard 100W. Do not specify.)  CFL (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/CFL</b> <b>26/CFL</b> <b>32/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)  HID (High Intensity Discharge)  MH (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b>  HPS (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b>	Ballast option not available for INC.  <b>RB</b> (3) (Remote)  <b>BCM</b> (Canopy Mount)  <b>PLB</b> (4) (Postline ballast)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)  PLB <b>1</b> (120V) <b>2</b> (277V)

H-WGUGR-8 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

**Notes:**

(1) For interior finish of fixture refer to color chart on pages 344-348. H-WGUGR-8 through H-WGUGR-18 not available in copper, brass or aluminum finishes.

(2) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

(3) (RB) Remote Ballast is not available for Fluorescent Lamping.

(4) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W and 100W HPS require a 3" dia. pole.

**Suitable for wet location.**  
 (Except when cord mounted)