




Job Name: _____
 Type: _____
 Quantity: _____


Saucer Vapor Jar Collection

For Post Mount (PM)
or Column Mount (CM)

Fixture No.	Height (A)	Width (B)	Mount (C)
H-CGU-10-PM	10"	10"	3"
H-LCGU-14-PM	12"	13"	3"
H-CGU-10-RG-PM	12"	10"	3"
H-LCGU-14-RG-PM	12"	13"	3"
H-CGU-10-1-PM	10"	10"	3"
H-LCGU-14-1-PM	12"	13"	3"
H-CGU-10-RG-1-PM	10"	10"	3"
H-LCGU-14-RG-1-PM	12"	13"	3"
H-CGU-10-CM	10"	10"	6"
H-LCGU-14-CM	12"	13"	7"
H-CGU-10-1-CM	11"	10"	6"
H-LCGU-14-1-CM	12"	13"	7"

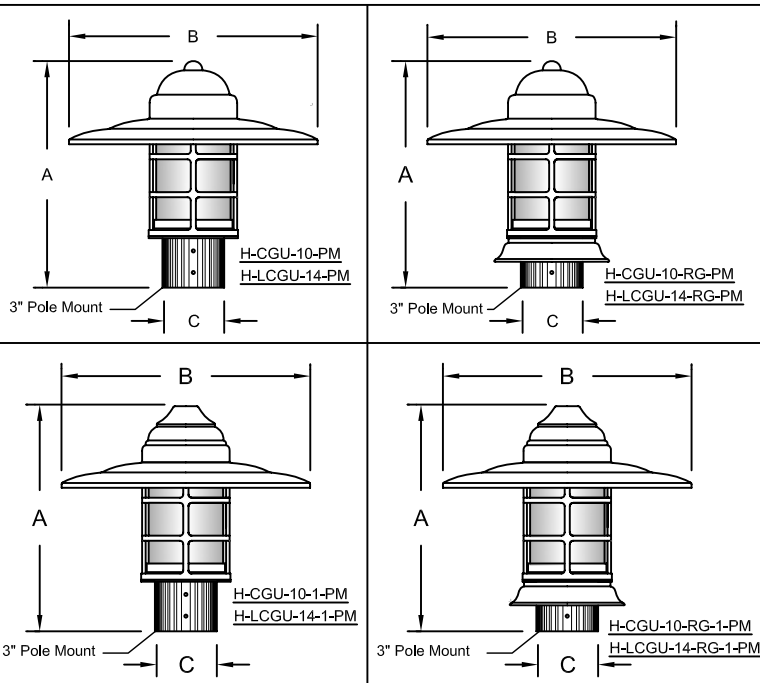

Fixture No.	Fixture Color	Glass Color	Wattage/Lamp options	Ballast	Voltage
H-CGU-10-PM ⁽¹⁾ H-LCGU-14-PM ⁽¹⁾ H-CGU-10-RG-PM ⁽¹⁾ H-LCGU-14-RG-PM ⁽¹⁾ H-CGU-10-1-PM ⁽¹⁾ H-LCGU-14-1-PM ⁽¹⁾ H-CGU-10-RG-1-PM ⁽¹⁾ H-LCGU-14-RG-1-PM ⁽¹⁾ H-CGU-10-CM ⁽¹⁾ H-LCGU-14-CM ⁽¹⁾ H-CGU-10-1-CM ⁽¹⁾ H-LCGU-14-1-CM ⁽¹⁾	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20. Upgraded Finishes. ⁽²⁾ 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49. For finish specs see pages 344-348.	CLR (Clear) RIB (Clear Ribbed) FR (Frost) RD (Red) BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle)	Incandescent ⁽¹⁾ (Fixture is standard 100W or 200W. Do not specify.) CFL (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH HPS (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC. For Column Mount Series only BCM (Canopy Mount) For Post Mount Series only PLB ⁽³⁾ (Postline) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/ 240/277V) PLB 1 (120V) 2 (277V)

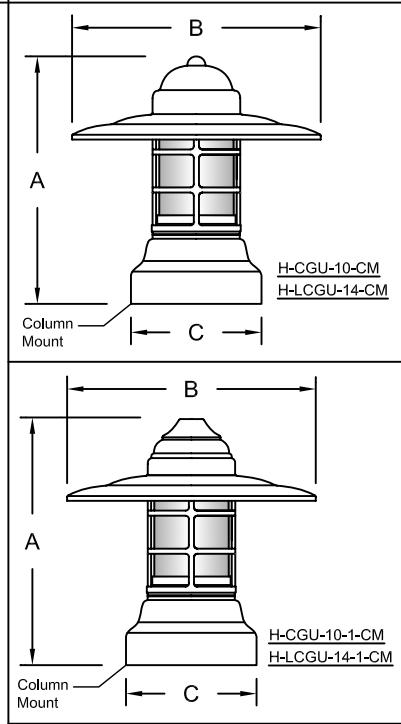

H-CGU-10-PM - 91 - CLR / 13/CFL / BCM - M

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-CGU-10-PM, H-CGU-10-CM, H-CGU-10-RG-PM, H-CGU-10-RG-1-PM, H-CGU-10-1-CM and H-CGU-10-1-PM available for 100W Max INC, 32W Max CFL and 100W Max HID.
H-LCGU-14-PM, H-LCGU-14-CM, H-LCGU-14-RG-1-PM, H-LCGU-14-1-PM, H-LCGU-14-1-CM and H-LCGU-14-RG-PM available for 200W Max INC, 42W Max CFL and 175W Max HID.
- (2) Casting will be painted to match copper or brass finishes.
- (3) (PLB) Post Line Ballast must specify 120V or 277V.
(PLB) 50W MH requires a 3" dia. pole.
(PLB) 70W and 100W MH require a 4" dia. pole.
(PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

Suitable for wet location.